

FLEXI-SEAL

FOR BASEMENTS & CRAWL SPACES



WHAT IS FLEXI-SEAL?

Flexi-Seal is a reinforced flexible membrane, the main component used in constructing closed, conditioned or vented crawlspaces. Flexi-Seal exceeds ASTM E-1745 requirements for a vapor and moisture barrier. Flexi-Seal conforms to all building code requirements for use in crawlspace encapsulation.

HOW FLEXI-SEAL WORKS

Entire basements and crawlspaces can be completely sealed off from external moisture and ground vapor. Flexi-Seal transforms a dark dingy foundation into a clean, dry storage area that can be walked on.

WHY FLEXI-SEAL?


- STOPS MOISTURE PENETRATION
- SEALS OUT GROUND VAPORS
- REINFORCED HEAVY DUTY MATERIAL
- BRILLIANT WHITE FINISH
- TOUGH, DURABLE & TEAR RESISTANT
- LIFETIME WARRANTY

PHYSICAL PROPERTIES

THICKNESS:	14 Mil, 20 Mil	ELONGATION:	MD 23% CD 30%
WEIGHT:	6.3 OZ. SQ. YD.	PERM RATING:	ASTM TEST E96 FLEXI-SEAL .022 (U.S. PERMS)
TENSILE STRENGTH:	MD 64 LBS CD 112 LBS	TEAR STRENGTH:	MD 23 LBS CD 14 LBS

ANTIMICROBIAL ADDITIVE

99.9% reduction in *Aspergillus Niger*, *Chaetomium globosum*, *Penicillium funiculosum*, *Aureobasidium pullulans*, *Trichoderma virens*.

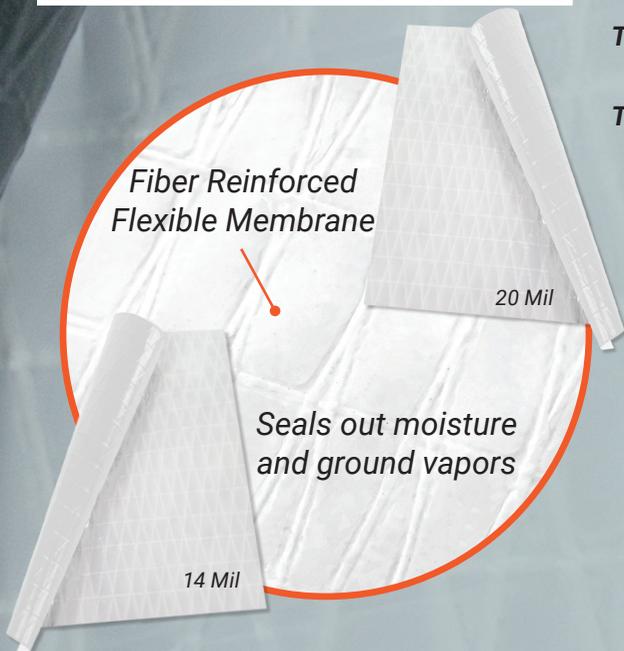

Item #	Description
14 Mil	
FS10004	4' x 100' Roll
FS10006	6' x 100' Roll
FS10008	8' x 100' Roll
FS10010	10' x 100' Roll
FS10012	12' x 100' Roll
FS05024	24' x 50' Roll
20 Mil	
FS620WW	6' x 100' Roll
ACCESSORIES (Sold Separately)	
FSTAPE4	Flexi-Seal Tape, 4" x 60 yds.
FSDBLBL	Double Sided Black Tape, 1.5" x 300'
XT07501	3/4" Xmas Tree Fasteners